

INVITATION FOR QUOTATION

Date: 27/08/2026

You are invited to submit your most competitive quotation for the following works:

S. No.	Name of the Work	Size	Quantity	EVC (Rs. in Lakhs approx. with Tax)
1	Check Dams	As per the attached Annexure	2	18.4

To assist you in the preparation of your quotation, we are enclosing the following:

- a) Detailed Bill of Quantities
- b) Instructions to Bidders
- c) Draft Contract Agreement format, which will be used to finalise the agreement for this Contract.

You are requested to submit your offer by 02/09/2026, before 5:00 pm.

Quotations will be opened in the presence of Bidders or their representatives who choose to attend on 03.09.2026 at 11 am in the office of **BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT, 17-1-382/SN/52, Srinivasa Nagar Colony, Near Sports Club, Champapet, Hyderabad 500059**. We look forward to receiving your quotations, and thank you for your interest in this project.

For BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT



Sri. B. Shivarudrappa
Vice President - Programmes and Regional Director

Instructions to Bidders

1. Scope of Works

BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT, Telangana (EMPLOYER), invites quotations for the work as detailed in the table below.

S. No.	Name of the Work	Size	Quantity	EVC (Rs. in Lakhs approx. with Tax)
1	Check Dams	As per the attached Annexure	2	18.4

The successful bidder will be expected to complete the above work by September 21st 2026. The bidder may submit quotations for all the activities or may give quotations for any specific job in which they have prior experience.

2. Eligibility criteria of the bidder

- Financial turnover not less than Rs 10 lakhs for Civil projects
- Satisfactorily completed as prime contractor (or as a sub-contractor duly certified by the employer/main contractor) at least one similar work of value not less than Rs 05 lakhs OR satisfactorily completed as prime contractor (or as a sub-contractor duly certified by the employer/main contractor) at least two similar works of value not less than Rs. 05 lakhs.
- Vendor should have an office in Telangana or Andhra Pradesh.

3. Bid Price

- The contract shall be for all works described in the bill of quantities, drawings, and technical specifications. Corrections, if any, shall be made by crossing out, initiating, dating and rewriting.
- All duties, taxes and other levies payable by the contractor under the contract shall be included in the total price.
- The rates quoted by the bidder shall be fixed for the duration of the contract and shall not be subject to adjustment on any account.
- The rates should be quoted only for Indian rupees.

4. Submission of Quotations

- The bidder is advised to visit the site of works at his own expense and obtain all information necessary for preparing the quotation.
- Each bidder shall submit only one quotation.
- The quotation submitted by the bidder shall comprise of the following: -
 - Quotation in the format given in Annexure I
 - Signed Bill of Quantities as per Annexure II; and
 - Audited financial statement and work completion report from the concerned authorities as proof for items mentioned in clause 2(a) and clause 2(b).
 - GST & Income tax clearance certificate and contractor license valid as of the date
- Quotations must be received in the office of **BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT, 17-1-382/SN/52, Srinivasa Nagar Colony, Near Sports Club, Champapet, Hyderabad 500059**, not later than the time and date given in the letter of invitation. If the specified date is declared a holiday, quotations shall be received up to the appointed time on the next working day.
- Any quotation received by **BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT – 17-1-382/SN/52, Srinivasa Nagar Colony, Near Sports Club, Champapet, Hyderabad 500059** after the deadline for submission of quotations, will be rejected and returned unopened to the bidder.

5. Validity of Quotation

The quotation shall remain valid for 15 days after the submission deadline.

6. Opening of Quotations

Quotations will be opened in the presence of bidders or their representatives who choose to attend on the specified date and time at the designated location.

- 7.** Information related to the evaluation of quotations and recommendations for the award of a contract shall not be disclosed to bidders or any other persons not officially concerned with the process until the award to the successful bidder is announced.

8. Evaluation of Quotations

The Employer will evaluate and compare the quotations determined to be substantially responsive i.e. which

- a) Meet the qualification criteria specified in clause two above.
- b) Are properly signed; and
- c) Conform to the terms and conditions, specifications, and drawings without material deviations.

9. Award of Contract

The Employer will award the contract to the bidder whose quotation has been determined to be substantially responsive, who has offered one of the three lowest evaluated quotation prices, who meets the specified qualification criteria, who comprehensively agrees to all the terms and conditions mentioned in this document, and who agrees to the terms as outlined below. BAIF Institute for Sustainable Livelihoods and Development reserves the right to finalise the bidding process among the three lowest bidders.

- a) The party whose quotation is accepted will be notified of the award of the contract by the Employer before the expiry of the validity period of the quotation. The terms of the accepted offer shall be incorporated in the Purchase Order.
 - b) The contract may be given to more than one bidder/s as found suitable if they agree to provide the material at the least price offered.
 - c) The contract shall be terminated at any point if the quality of material delivered, the scope of work and the specifications are unsatisfactory. The payment for work done to date shall be released in favour of the bidder only after satisfactory inspection by the BAIF Institute for Sustainable Livelihoods and Development.
 - d) The arrangement of water and electric power and any other machine and equipment (cranes, excavators, etc.) necessary for installation, transportation, handling, etc., will be within the bidders' scope. Bidders are requested to include all such costs in their bids.
 - e) The bidder shall submit a work completion report mentioning the amount of work done.
- 10.** Notwithstanding the above, the Employer reserves the right to accept or reject any quotation, cancel the bidding process, and reject all quotations at any point in time before the award of the contract.
- 11.** The bidder whose bid is accepted, will be notified of the award of the contract by the Employer before expiry of the validity period of the quotation.

.....

QUOTATION

Annexure I

To:

BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT

17-1-382/SN/52, Srinivasa Nagar Colony, Near Sports Club, Champapet, Hyderabad 500059

Subject: Quotation for Construction of Check Dams, with a minimum size of 15 meters, based on The feasibility of the location in Tekur village, Nyalkal block of Sanga Reddy District, Telangana.

Reference: Request for quotation dated _____ from BAIF Institute for Sustainable Livelihoods and Development – 17-1-382/SN/52, Srinivasa Nagar Colony, Champapet, Hyderabad 500059

Sir,

We offer to execute the Works described in your letter referred to above in accordance with the Conditions of Contract enclosed therewith for a total Contract Price of Rs. _____ (as per details of work specifications given in Annexure II attached herewith)

[in figures]

Rs. _____ [in words] including taxes.

This quotation and your written acceptance shall constitute a binding contract between us. We understand that you are not bound to accept the lowest of any quotation you receive.

We certify that we have taken steps to ensure that no person acting on our behalf will engage in bribery or corruption.

We hereby confirm that this quotation is valid for 45 days as required in Clause 5 of the Instructions to Bidders.

Yours faithfully

Date: _____

Authorised Signature :

Name & Title of Signatory : _____

Name of Bidder : _____

Address : _____

**LETTER OF ACCEPTANCE (ON LETTER HEAD OF THE EMPLOYER)-CUM-NOTICE TO PROCEED
WITH THE WORK**

To:

Date:

Name and Address of the Contractor

Dear Sirs,

This is to notify you that we accept your quotation dated [Date] for executing the contract price of rupees [Amount in words and figures].

It is also stated that if any of the completed work is found to have a fault/becomes damaged within 12 months, the same shall be attended to by the vendor at his own cost.

You are also requested to sign the agreement form and proceed with the work, no later than the specified deadline, under the instructions of the Project Coordinator, and ensure its completion within the contract period.

With the issuance of this acceptance letter, the contract for the above-mentioned work stands concluded.

Yours faithfully

Authorised Signature
Name and title of Signatory


Check Dam- 01


M&M FD-JAL SAMRUDHHI-Nyalkal Mandal,Sangareddy Dist.						
PIA: BISLD TG			Supported By: M&M FD Project			
Abstract Estimate						
Name of the Work: Construction of Check Dam 1 across Tekur Village, Sangareddy Dist						
SN	Description	Quantity	Unit	Rate	Per	Amount in Rs.
1	IRR-PMW-1-8 Cutting and removing juliflora bushes up to 1.5 m girth, excluding removal of stumps and including burning or disposing off the materials as directed, with initial lead up to 50 m and all lifts	495.00	Sqm			
2	IRR-CAW-1-1 Excavation in all kinds of soil including boulders upto 0.3 m diameter for canal, seating of embankment, filter drains / catch water drains etc., including dressing bed and sides to required level and profile, cost of all materials, machinery, labour, placing the excavated soil neatly in dump area or for the formation of service road/embankment as directed etc., complete with initial lead upto 1 km and all lifts.	1856	Cum			
3	IRR-CAW-7-11 Providing and laying insitu vibrated M-10 (28 days cube compressive strength not less than 10 N/sqm) grade cement concrete using 40 mm downsize approved, clean, hard, graded aggregated for bed and side lining of canal (100 mm thick) including, finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead-up to 50 m and all lifts (43 Gr Cement content: 250 kg / cum for use of super plasticiser(0.4% by wt. of cement), CA : 0.90cum, Blending Ratio of CA--50:30:20, FA : 0.40 cum)	41.1	Cum			
4	IRR-CAW-7-15 Providing and laying in situ vibrated M-15 (28 days cube compressive strength not less than 15 N /sq mm) grade cement concrete using 20 mm downsized approved, clean, hard, graded aggregates for bed and side lining(of thickness 100 mm) of canal including finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports, cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead upto 50 m and all lifts. (Cement content: 300 kg / cum for use of super plasticiser(0.4% by wt. of cement), CA : 0.80 cum, Blending Ratio of CA--65:35, FA : 0.45 cum)	38.1	Cum			
5	Curing charges during and after completion of work	7.00	Day			
6	Sign Board (Cuduppa Slab with Painting Charges)					
7	White wash (2 coats Primer)					
Amount						
GST						
Total Amount						

M&M FD-JAL SAMRUDHHI-Nyalkal Mandal, Sangareddy Dist.						
PIA: BISLD TG			Supported By: M&M FD			
Detailed Estimate						
Name of the Work: Construction of Check Dam 1 across Tekur village, Sangareddy Dist.						
SN	Description of item / Task		Length (Mts)	Breadth (Mts)	Depth (Mts)	Quantity (Cum/Sqm/No.)
1	IRR-PMW-1-8 Cutting and removing juliflora bushes upto 1.5 m girth excluding removal of stumps and including burning or disposing off the materials as directed, with initial lead up to 50 m and all lifts					
	Upstream Side		18.00	15.00		270.00
	Downstream Side		15.00	15.00		225.00
	Sub Total					495.00
2	IRR-CAW-1-1 Excavation in all kinds of soil including boulders upto 0.3 m diameter for canal, seating of embankment, filter drains / catch water drains etc., including dressing bed and sides to required level and profile, cost of all materials, machinery, labour, placing the excavated soil neatly in dump area or for the formation of service road/embankment as directed etc., complete with initial lead upto 1 km and all lifts.					
	Body Wall		15.00	0.50	1.20	9.00
	Apron		15.00	3.00	0.30	13.50
	Downstream Side Cutoff		15.00	0.60	1.50	13.50
	Side Walls U/S	L/S	2.50	0.50	0.60	0.75
	Side Walls U/S	R/S	2.50	0.50	0.60	0.75
	Returns	L/S	1.50	0.50	0.60	0.45
	Returns	R/S	1.50	0.50	0.60	0.45
	Side Walls D/S	L/S	3.00	0.50	0.60	0.90
	Side Walls D/S	R/S	3.00	0.50	0.60	0.90
	Returns	L/S	1.50	0.50	0.60	0.45
	Returns	R/S	1.50	0.50	0.60	0.45
	Channel Desilting	U/S	50.00	15.00	1.10	825.00
	Channel Desilting	D/S	60.00	15.00	1.10	990.00
	Sub Total				1856.10	
3	IRR-CAW-7-11 Providing and laying insitu vibrated M-10 (28 days cube compressive strength not less than 10 N/sqm) grade cement concrete using 40 mm down size approved, clean, hard, graded aggregated for bed and side lining of canal (100 mm thick) including, finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead up to 50 m and all lifts (43 Gr Cement content: 250 kg / cum for use of super plasticiser(0.4% by wt. of cement), CA : 0.90cum, Blending Ratio of CA--50:30:20, FA : 0.40 cum)					
	Body Wall		15.00	0.50	1.20	9.00
	Apron		15.00	3.00	0.30	13.50
	Downstream Side Cutoff		15.00	0.60	1.50	13.50
	Side Walls U/S	L/S	2.50	0.50	0.60	0.75
	Side Walls U/S	R/S	2.50	0.50	0.60	0.75
	Returns in U/S	L/S	1.50	0.50	0.60	0.45

	Returns in U/S	R/S	1.50	0.50	0.60	0.45
	Side Walls D/S	L/S	3.00	0.50	0.60	0.90
	Side Walls D/S	R/S	3.00	0.50	0.60	0.90
	Returns in D/S	L/S	1.50	0.50	0.60	0.45
	Returns in D/S	R/S	1.50	0.50	0.60	0.45
	Sub Total					41.10
4	IRR-CAW-7-15 Providing and laying insitu vibrated M-15 (28 days cube compressive strength not less than 15 N/sq mm) grade cement concrete using 20 mm down size approved, clean, hard, graded aggregates for bed and side lining(of thickness 100 mm) of canal including finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports, cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead upto 50 m and all lifts. (Cement content: 300 kg / cum for use of super plasticiser(0.4% by wt. of cement), CA : 0.80 cum, Blending Ratio of CA--65:35, FA : 0.45 cum)					
	Main Dam		15.00	0.90	1.20	16.20
	Side Walls U/S	L/S	2.50	0.50	2.50	3.13
	Side Walls U/S	R/S	2.50	0.50	2.50	3.13
	Returns in U/S	L/S	1.50	0.50	2.50	1.88
	Returns in U/S	R/S	1.50	0.50	2.50	1.88
	Side Walls D/S	L/S	3.00	0.50	1.70	2.55
	Side Walls D/S	R/S	3.00	0.50	1.70	2.55
	Returns	L/S	1.50	0.50	0.90	0.68
	Returns	R/S	1.50	0.50	0.90	0.68
	Water cushion wall		12.00	0.50	0.30	1.80
	Apron Coping Concrete		12.00	3.00	0.10	3.60
	Total					38.05

Check Dam -1

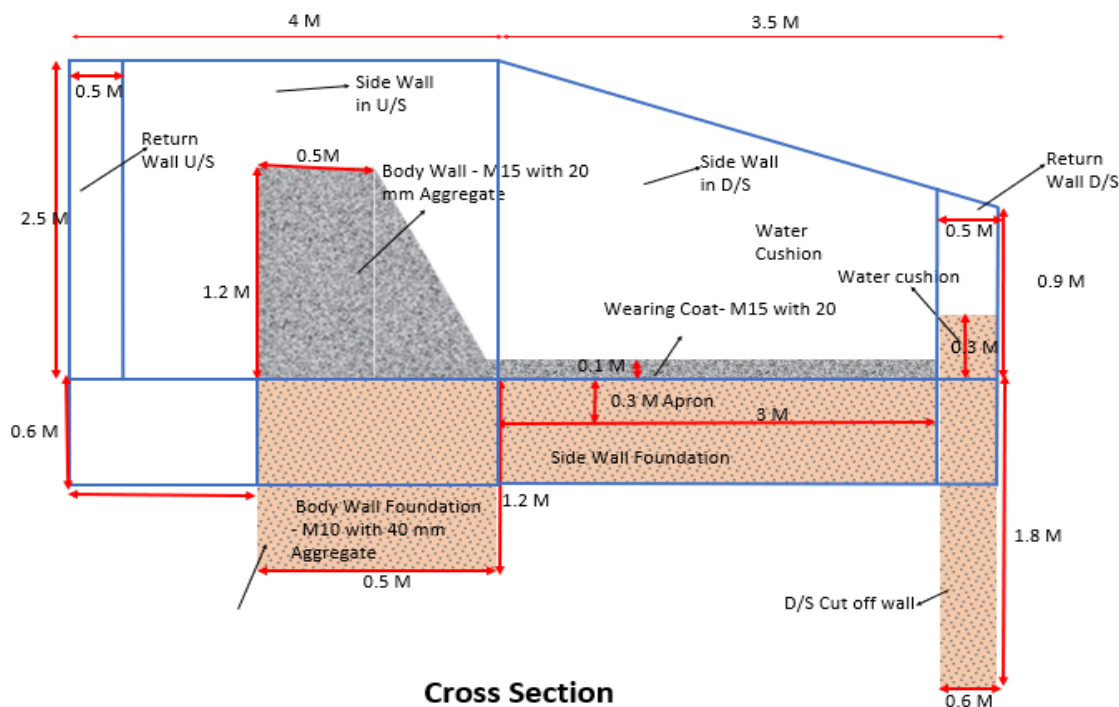

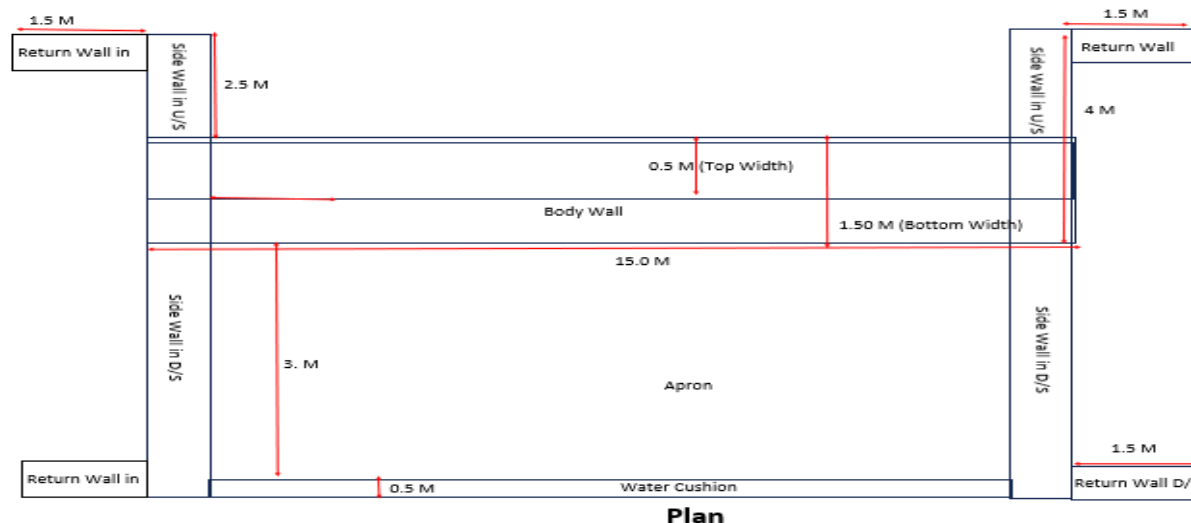

CHECK DAM-02

M&M FD-JAL SAMRUDHHI-Nyalkal Mandal,Sangareddy Dist.						
PIA: BISLD TG			Supported By: M&M FD			
Abstract Estimate						
Name of the Work: Construction of Check Dam 2 across Tekur village, Sangareddy dist.						
S N	Description	Quantity	Unit	Rate	Per	Amount in Rs.
1	IRR-PMW-1-8 Cutting and removing juliflora bushes up to 1.5 m girth, excluding removal of stumps and including burning or disposing off the materials as directed with initial lead up to 50 m and all lifts	1350.00	Sqm			
2	IRR-CAW-1-1 Excavation in all kinds of soil including boulders up to 0.3 m diameter for canal, seating of embankment, filter drains / catch water drains etc., including dressing bed and sides to required level and profile, cost of all materials, machinery, labour, placing the excavated soil neatly in dump area or for the formation of service road/embankment as directed etc., complete with initial lead upto 1 km and all lifts.	1661	Cum			
3	IRR-CAW-7-11 Providing and laying in situ vibrated M-10 (28 days cube compressive strength not less than 10 N/sqm) grade cement concrete using 40 mm downsized approved, clean, hard, graded aggregate for bed and side lining of canal (100 mm thick) including finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports, cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead up to 50 m and all lifts (43 Gr Cement content: 250 kg / cum for use of super plasticiser(0.4% by wt. of cement), CA : 0.90 cum, Blending Ratio of CA-- 50:30:20, FA:0.40 cum)	41.1	Cum			


4	IRR-CAW-7-15 Providing and laying in situ vibrated M-15 (28 days cube compressive strength not less than 15 N/sq mm) grade cement concrete using 20 mm downsized approved, clean, hard, graded aggregates for bed and side lining (of thickness 100 mm) of canal including finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports, cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead upto 50 m and all lifts. (Cement content: 300 kg / cum for use of super plasticiser (0.4% by wt. of cement), CA: 0.80 cum, Blending Ratio of CA--65:35, FA: 0.45 cum)	39.4	Cum			
5	Curing charges during and after completion of work	7.00	Day			
6	Sign Board (Cuduppa Slab with Painting Charges)					
7	White wash (2 coats Primer)					
Amount						
GST						
Total Amount						

M&M FD-JAL SAMRUDHHI-Nyalkal Mandal, Sanggareddy Dist.						
PIA: BISLD TG			Supported By: M&M FD			
Detailed Estimate						
Name of the Work: Construction of Check Dam 2 across Tekur village, Sangareddy dist.						
SN	Description of Item / Task		Length (Mts)	Breadth (Mts)	Depth (Mts)	Quantity (Cum/Sqm/No.)
1	IRR-PMW-1-8 Cutting and removing juliflora bushes upto 1.5 m girth excluding removal of stumps and including burning or disposing off the materials as directed with initial lead upto 50 m and all lifts					
	Upstream Side		50.00	15.00		750.00
	Downstream Side		40.00	15.00		600.00
	Sub Total					1350.00
2	IRR-CAW-1-1 Excavation in all kinds of soil including boulders upto 0.3 m diameter for canal, seating of embankment, filter drains / catch water drains etc., including dressing bed and sides to required level and profile, cost of all materials, machinery, labour, placing the excavated soil neatly in dump area or for the formation of service road / embankment as directed etc., complete with initial lead upto 1 km and all lifts.					
	Body Wall		15.00	0.50	1.20	9.00
	Apron		15.00	3.00	0.30	13.50
	Downstream Side Cutoff		15.00	0.60	1.50	13.50
	Side Walls U/S	L/S	2.50	0.50	0.60	0.75
	Side Walls U/S	R/S	2.50	0.50	0.60	0.75
	Returns	L/S	1.50	0.50	0.60	0.45
	Returns	R/S	1.50	0.50	0.60	0.45
	Side Walls D/S	L/S	3.00	0.50	0.60	0.90


	Side Walls D/S	R/S	3.00	0.50	0.60	0.90
	Returns	L/S	1.50	0.50	0.60	0.45
	Returns	R/S	1.50	0.50	0.60	0.45
	Channel Desilting	U/S	80.00	15.00	1.10	1320.00
	Channel Desilting	D/S	20.00	15.00	1.00	300.00
	Sub Total					1661.10
3	IRR-CAW-7-11 Providing and laying insitu vibrated M-10 (28 days cube compressive strength not less than 10 N/sqm) grade cement concrete using 40 mm downsize approved, clean, hard, graded aggregate for bed and side lining of canal(100 mm thick) including, finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead up to 50 m and all lifts (43 Gr Cement content: 250 kg / cum for use of super plasticiser(0.4% by wt. of cement),CA : 0.90cum, Blending Ratio of CA--50:30:20, FA : 0.40 cum)					
	Body Wall		15.00	0.50	1.20	9.00
	Apron		15.00	3.00	0.30	13.50
	Downstream Side Cutoff		15.00	0.60	1.50	13.50
	Side Walls U/S	L/S	2.50	0.50	0.60	0.75
	Side Walls U/S	R/S	2.50	0.50	0.60	0.75
	Returns in U/S	L/S	1.50	0.50	0.60	0.45
	Returns in U/S	R/S	1.50	0.50	0.60	0.45
	Side Walls D/S	L/S	3.00	0.50	0.60	0.90
	Side Walls D/S	R/S	3.00	0.50	0.60	0.90
	Returns in D/S	L/S	1.50	0.50	0.60	0.45
	Returns in D/S	R/S	1.50	0.50	0.60	0.45
	Sub Total					41.10
4	IRR-CAW-7-15 Providing and laying insitu vibrated M-15 (28 days cube compressive strength not less than 15 N /sq mm) grade cement concrete using 20 mm down size approved, clean, hard, graded aggregates for bed and side lining(of thickness 100 mm) of canal including finishing the junction of bed and sides to required curvature, cost of all materials, machinery, labour, formwork including supports, cleaning, batching, mixing, placing in position, levelling, vibrating, finishing, curing etc., complete with initial lead up to 50 m and all lifts. (Cement content: 300 kg / cum for use of super plasticiser(0.4% by wt. of cement), CA : 0.80 cum, Blending Ratio of CA--65:35, FA : 0.45 cum)					
	Main Dam		15.00	0.90	1.20	16.20
	Side Walls U/S	L/S	2.50	0.50	2.50	3.13
	Side Walls U/S	R/S	2.50	0.50	2.50	3.13
	Returns in U/S	L/S	1.50	0.50	2.50	1.88
	Returns in U/S	R/S	1.50	0.50	2.50	1.88

Side Walls D/S	L/S	3.00	0.50	1.70	2.55
Side Walls D/S	R/S	3.00	0.50	1.70	2.55
Returns	L/S	1.50	0.50	0.90	0.68
Returns	R/S	1.50	0.50	0.90	0.68
Water cushion wall		15.00	0.50	0.30	2.25
Apron Coping Concrete		15.00	3.00	0.10	4.50
Sub Total					39.40

Check Dam -2

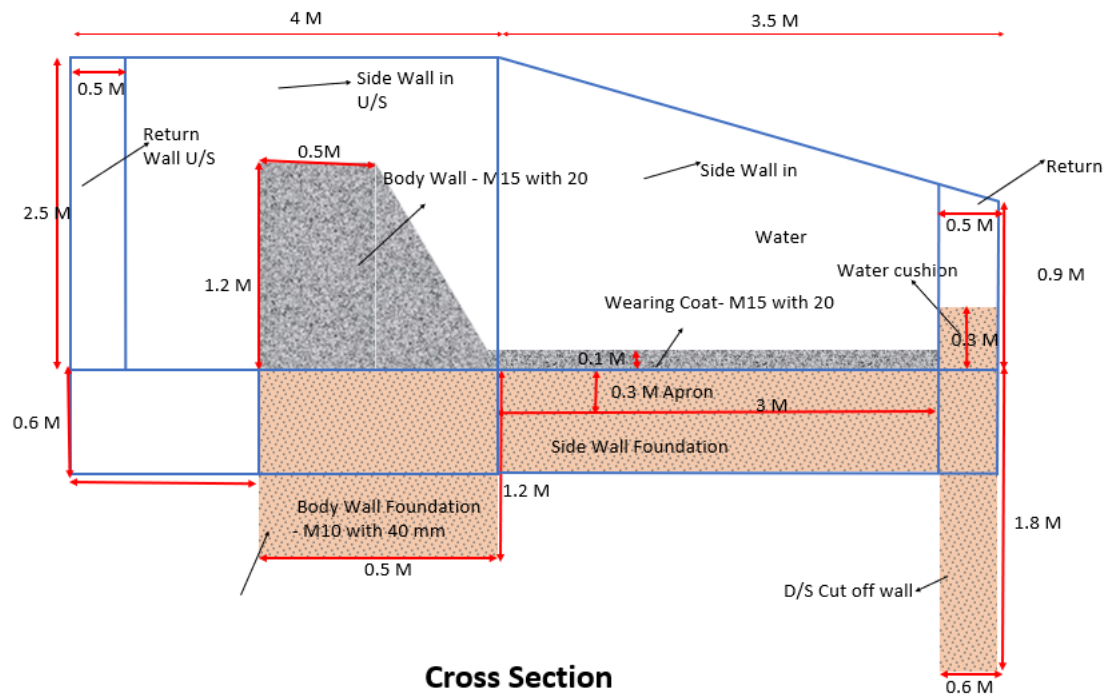

Cross Section

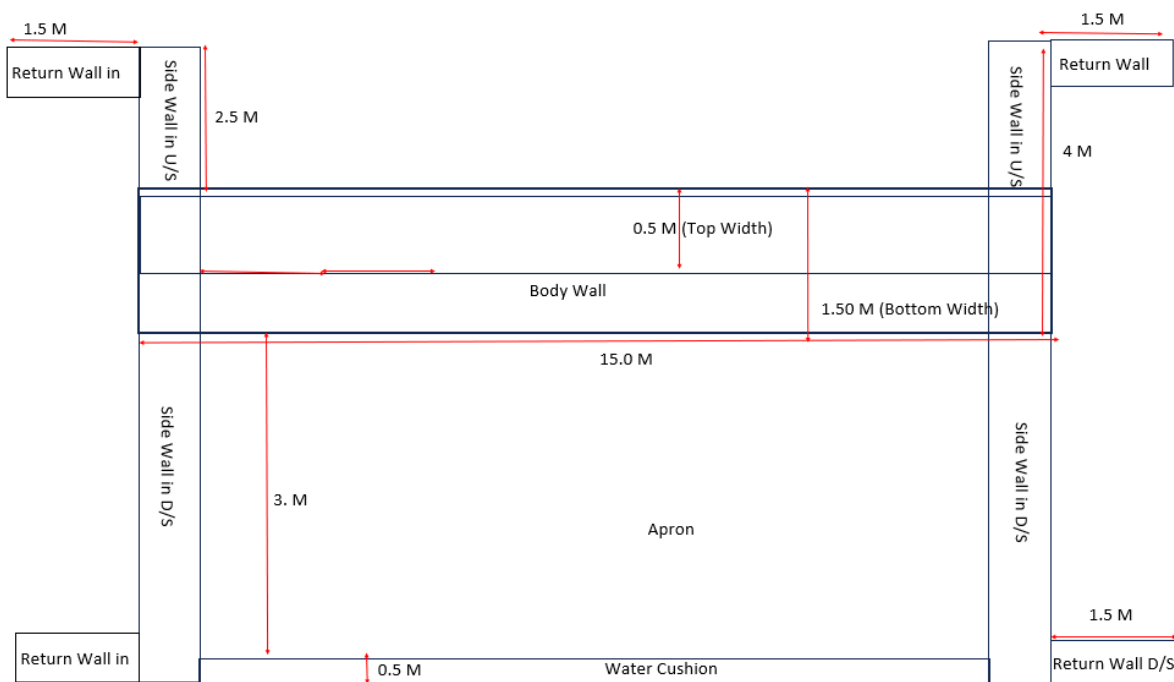

Plan