BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT

State Office: Madhya Pradesh

E-7/226, Bharat Nagar Road. Arera Colony, Bhopal 462016

E TENDER INVITATION FOR QUOTATION

To **Date: 26-10-2026**

_____

_____

_____

Dear Sir / Madam,

Sub.: INVITATION FOR QUOTATION FOR CONSTRUCTION OF NEW CHECK DAM

You are invited to submit your most competitive quotation for the following product:

Sr. No.	Brief description of the product/work/ service	Specifications	Qty. (Unit)	Place of delivery/work/ service
1	Construction of New Check Dam	As per attached estimate and Design	01	Village Singauda, Dist-Dewas, M.P.

Detailed Description of the Product: As above

1. **Quoted Price:**

a. The offer shall be for the full quantity as described above. Corrections, if any, shall be made by crossing out, initialing, dating, and re-writing.
b. The party shall quote for goods/services in the attached format of the quotation.
c. All duties, taxes, and other levies payable on the raw materials and components shall be included in the total price.
d. The rates quoted by the party shall be fixed for the duration of the contract and shall not be subject to adjustment on any account.
e. Delivery and transportation at the cost of the party.
f. The prices shall be quoted in Indian Rupees only.

2. Each party must submit only one **SEALED** quotation. Party shall not contact other parties in matters related to this quotation.

3. Validity of Quotation

The quotation shall remain valid for a period not less than 30 days after the deadline fixed for submission of quotations.

4. **Evaluation of Quotations**

a. BAIF will evaluate and compare the quotations determined to be substantially responsive i.e. which are properly signed, and conform to the terms & conditions and specifications.

b. The evaluation would be done for all the goods / services put together or separately as feasible. The items for which no rates have been quoted would be treated as zero and the total amount would be computed accordingly.
c. A list of similar work undertaken with details of clients etc. if any, should be provided.
d. Contract will be awarded to the responsive party/parties based on technical-cum-commercial grounds.

5. **Award of Contract**

a. The contract will be awarded to the party/parties whose quotation has been determined to be substantially responsive and technical specifications and commercial terms best suited to the requirement. BAIF/BISLD, prior to the expiry of the validity period of the quotation, will notify the party/parties whose quotation has been accepted for the award of contract. The terms of the accepted offer shall be incorporated in the Purchase Order or Work Order. Quotations shall include GST and PAN Numbers.
b. Notwithstanding the above, BAIF reserves the right to accept or reject any quotation and to cancel the procurement process and reject all quotations any time prior to the award of the contract.
c. Rate contracts can be entered into for subsequent procurement. Order may be given partially and in multiple slabs.
d. The party/parties are bound to abide by the Organisation's Internal Committee guidelines.

6. Normal commercial guarantee / warranty shall be applicable to the supplied goods.

7. Terms of Payment: Within 10 days after delivery by cheque / electronic transfer on receipt of invoice**.**

8. Queries pertaining to specifications and scope, if any, may be clarified by contacting **Mr. Balwan Chouhan Mobile No. 9755134225 during office hours.**

9. You are requested to provide your offer on or **before 1st November 2026** in the name of **BISLD Madhya Pradesh** only at the above address or send a mail to **bisld.mp@baif.org.in** with a password protected file only.

10. We look forward to receiving your quotations and thank you for your interest in this project.

BAIF Institute for Sustainable Livelihoods and Development



Authorised Signatory

CONSTRUCTION OF NEW CHECK DAM

BAIF Institute for Sustainable Livelihoods and Development
Name of Work: Stop Dam Construction
Name of Project: CSVDP /ITC Project, Sonkatch, Dewas
Name of Village: Singauda, Block Dewas, District Dewas (MP)
Longitude & Latitude: 22.853311N&76.331089E
Water User Group Name:

ABSTRACT SHEET

NO.	DESCRIPTION OF WORK	QUANTITY	RATE	UNIT	AMOUNT
(A)	EXCAVATION, FILLING AND SOILING				
A-1	EXCAVATION FOR FOUNDATION In all types of soil, including refilling around foundations & in plinth with selected excavated earth in 200 mm thick layers, watering, consolidating etc. & disposing off surplus earth by spreading at site as directed, complete. (including dewatering if required)				
a)	In earth, all types of soil and soft Murrum				
	I) up to 1500 mm depth	115.21		M^3	
b)	In Hard Murrum				
	I) up to 1500 mm depth	100.81		M^3	
c)	In Soft Rock				
	I) up to 1500 mm depth	72.01		M^3	
A-2	Providing and laying DRY TRAP RUBBLE SOILING 200 mm thick, all interstices filled in, thoroughly consolidated and rammed complete, FOR APRON	12.97		M^3	
	Masonry stone transportation	12.97		M^3	
(A)	**EXCAVATION, FILLING AND SOILING**		**- TOTAL**	**Rs.**	


(B)	CEMENT CONCRETE (PLAIN & REINFORCED)				
B-1	Providing and laying PLAIN CEMENT CONCRETE M-100 (1:3:6 nominal mix by volume) in foundation and elsewhere, using trap metal max. 40 mm size, including formwork, if any, consolidating, finishing and curing complete. (cement consumption 4.24 bag/m3)	24.80		M^3	
B-2	Providing and laying PLAIN CEMENT CONCRETE M-200 (1:2:4 nominal mix by volume, by using 53 grade cement) in bed-blocks, coping and elsewhere, using trap metal max. 40 mm size, including formwork, if any, consolidating, finishing and curing complete (cement consumption 6.00 bag/m3).	38.88		M^3	
B-4	Providing, cutting, bending, hooking, binding, placing in position STEEL REINFORCEMENT for all R.C.C. work at all levels, with chairs, supports etc. to provide proper cover complete. (binding wire not to be weighed for payment).				
a)	Mild Steel Plain Round Bars as per Structural details.	0.24		M.T.	


	& Tor Steel Bars as per Structural details.				
(B)	**CEMENT CONCRETE (PLAIN & REINFORCED)**		**- TOTAL**	**RS.**	
(C)	MASONRY WORK (Plumb Concrete)				
C-1	Plum cement concrete1:2:4 with 75% graded metal of 40 mm size and 25% plums of 150mm size. for ***body wall, head wall extension, transverse sill, side wall and wing wall*** including form work, scaffolding, stones used in plumb concrete shall be of trap stone quality, preferable quarry stones, including curing etc. complete (cement consumption 2.12 bags/m3 of plumb concrete).	229.47		M^3	
C-2	Centering and shuttering including strutting , propping etc. and removal of form work for P.C.C. work in foundation, footing, bases for column	294.60		Sqm.	
(C)	**MASONRY WORK (PLUMB CONCRETE)**			**Rs.**	
(D)	MS GATE				
D-1	Providing & fixing in position DOOR FRAMES for gate				
a)	M.S. Frame with ISMC 75x40 @6.8 kg/m I) 1200 * 1800	244.80		Kg	
D-2	Providing & fixing in position regulator gate in MS sheet 12 gauge framed in MS angle 35*35*5 with control wheel including rubber gaskets for smooth functioning including one coat of red oxide & two coats of brush applied synthetic enamel paint (ICI-Dulux or equivalent) complete.				
a)	Size 1200*1800	12.96		Sqm.	
E-1	Providing & fixing in position tor steel bars 60 mm diameter, in foundation including drilling holes in foundation, grouting with cement slurry etc complete (1.5 Mt length).	127.00		No.	
	Transverse sill (.90 m length bar)	40.00		No.	
E-2	Branding with Cement Concrete	1.00		No.	
E-3	APPROACH ROAD	1.00		No.	
E-4	Rubber Sealing	25.92		Rmt.	
E-5	Colouring water proof cement paint as per approved shade by funding agency. Painting with enamel paint, brushing, interior to give an even shade I/n cleaning the surface of all dirt dust and other foreign matter on steel and other metal surfaces. 2 Coats	421.31		Sqm.	
(E)	**MISCELLANEOUS ITEMS**		**- TOTAL**	**Rs.**	


Total	
GST 18%	
G Total	

Design

BAIF Institute for Sustainable livelihoods and Development
Name Of Work :- Stop Dam Construction
Name Of Project :- CSVDP /ITC Project,Sonkatch ,dewas
Name Of Village :-Singauda, Block Dewas, District - Dewas (M.P)
Longitude &latitude:-22.853311N&76.331089E
Water User Group Name :-

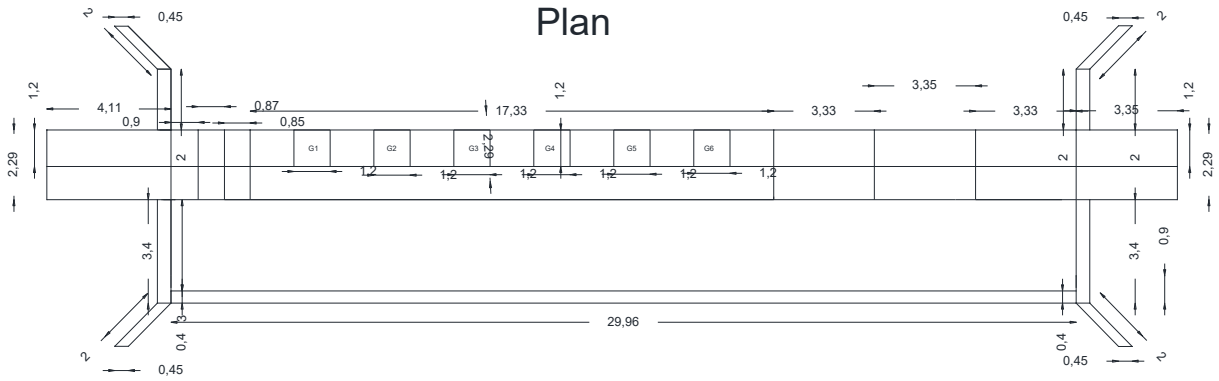

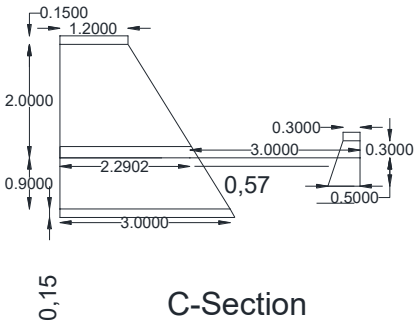

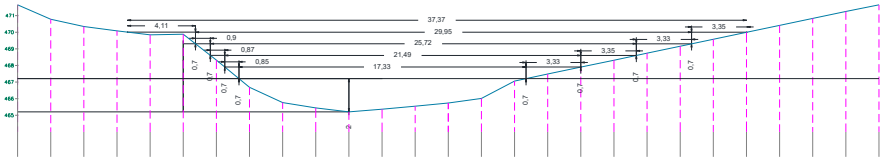

To be printed on letterhead / entered in printed quotation / proforma invoice / entered in this format with detailed stamp / seal)

Quotation No.:
Date:

To
The Chief Programme Executive
BISLD/BAIF

Quotation for _____

Sr. No.	Description of Goods	Specifications, scope, make, etc.	Unit	Qty.	Quoted Unit Price (Rs.)	Total Amount (Rs.) (A)	GST (__%) (Rs.) (B)	Other taxes/pkg./ installation charges/ Discount (Rs.) (C)	Transportation (Rs.) (D)	Gross Amount (Rs.) (A+B+C+D)
1										
2										
3										
4										
5										
	Total									

Terms and Conditions:

1. Warranty / Expiry :
2. Terms of payment :
3. Delivery of material within :
4. Delivery at :
5. Validity of quotation :
6. License (if applicable) (Enclose copy):
7. GST Registration No. (Enclose copy) : _____
8. Permanent Account Number (Enclose copy): _____

Signature and stamp of firm

Signature with Stamp of Firm
Name of Authorised Signatory