Tender Document

for

Installation of Chain Link Fencing (03 in No.) in 3 villages (Kaknai, Nagla Tarai & Shantipuri-2) of Champawat & U.S. Nagar Districts, Uttarakhand

BAIF Institute for Sustainable Livelihoods and Development
Nathanpur, Ring Road, Mussoorie Bypass, Jogiwala, Dehradun
Uttarakhand 248014 Telephone: 0135-2662908

NOTICE INVITING TENDER

Sealed tenders are invited in prescribed form by **BAIF Institute for Sustainable Livelihoods and Development, Nathanpur, Ring Road, Mussoorie Bypass, Jogiwala, Dehradun, Uttarakhand** from reputed, experienced, technically and financially sound agencies/contractors for the following work:

Tender Details

Date of issue of tender	27 October 2026
Last date and time for submission of Tender Documents	03 November 2026 till 5 pm
Mode of Submission	Password-protected pdf file to procurement.uttarakhand@baif.org.in or in a sealed envelope at BAIF Dehradun Office
Note: Tender form is given at the end of this document. Please use it for quoting your rate & cost, along with DD of Earnest money.	

1. The tender document can be downloaded from the official website: https://baif.org.in/tenders/
2. The sealed tender document duly filled in with the name of the work and the name of the tenderer written on the envelope, should be submitted at BAIF Institute for Sustainable Livelihoods and Development, Dehradun, India till 3rd November 2026 (5:00 pm) by hand / Registered Post / Courier / Password-protected pdf file to procurement.uttarakhand@baif.org.in


Name of work: Supply and Installation of **Chain Link Fencing (3 Units)**

Brief Description of Product	Quantity	Place of Installation	Completion date of project (Delivery and Installation)
Installation of Chain-Link Fencing	3	1. Village: Kaknai, District: Champawat, UK, 262523	Within 30 days from date of Work Order
		2. Village: Nagla Tarai, Khatima, U.S. Nagar 262308	
		3. Village: Shantipuri-2, Rudrapur, U.S. Nagar UK, 263148	

The technical specifications are as follows:

Annexure 1. Supply and Installation of Chain Link Fencing

Sr. No.	Component	Technical specification as per reference TS	Unit	Quantity	Total Quantity for 3 Units
1	Heavy / corner support posts	IS equal angle 50 × 50 × 5 mm, as per IS 808:2021; length 2.55 m; 2.10 m above ground level and 0.45 m below ground level; approximate spacing 40 m at corners/bends and as directed. **Total Post: 23 in No.**	kg	222.28	666.84
2	Diagonal support posts	IS equal angle 50 × 50 × 3 mm, as per IS 808:2021; length 2.55 m; diagonal bracing at heavy/corner posts as per approved drawing. **Total Post: 46 in No.**	kg	274.48	823.44
3	Intermediate posts	IS equal angle 50 × 50 × 3 mm, as per IS 808:2021; length 2.55 m; 2.10 m above ground and 0.45 m below ground. **Total Post: 68 in No.**	kg	405.76	1217.28
4	Chain link mesh	Hot-dip GI woven diamond mesh; aperture 50 mm × 50 mm (2 in × 2 in); wire diameter 2.70 mm (12 gauge); mesh height 1.80 m.	Rmt.	913.00	2739.00
5	GI barbed wire	GI barbed wire, 14-gauge, minimum wire diameter 2 mm, installed above chain link mesh.	Rmt.	1826.00	5478.00
6	Horizontal tension wires	Hot-dip GI tension wire, 10-gauge, diameter 3.15 mm, installed between/along the chain link mesh and properly tensioned.	Rmt.	2739.00	8217.00
7	Post foundation pits	Pit diameter 0.30 m and depth 0.45 m, excavated mechanically or by auger wherever suitable.	Rmt.	137.00	411.00
8	Concrete for post foundations	Plain cement concrete nominal mix 1:3:6, complete as per approved drawing and applicable specification.	cum	4.11	12.33

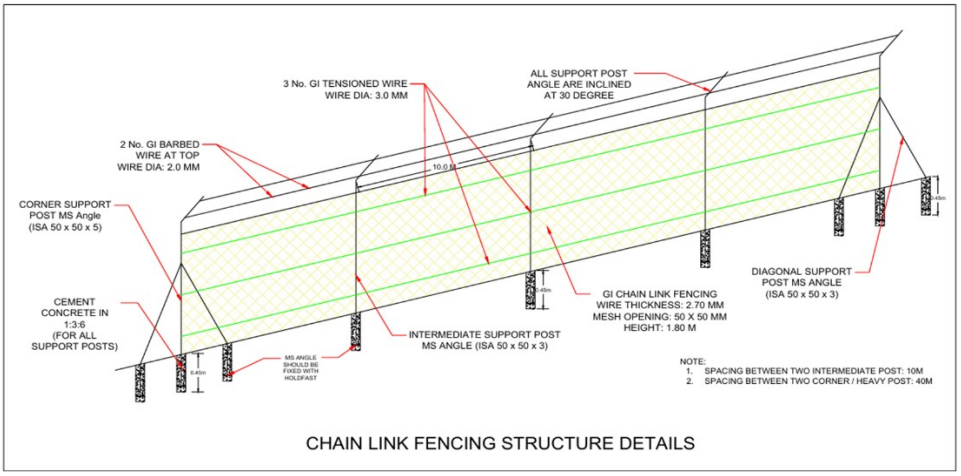

Structural drawing of the Chain Link Fencing.

Terms and Conditions:

1. Earnest money (**1% of Tender value**) shall be submitted along with the tender through **DD** in favour of **"BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT, UTTARAKHAND"** payable at **Dehradun**. Tenders will not be accepted without earnest money. The Earnest Money will be returned to unsuccessful tenderers within a reasonable time. The Earnest Money deposited by successful tenderer(s) will be retained towards the Security Deposit (Retained amount).
2. Mention the Warranty and Maintenance period of major items.
3. All items supplied must strictly conform to the specified technical specifications and will be inspected and verified by the Field Engineer before acceptance.
4. **Quantity Variation**: The quantities mentioned in the tender are indicative. During field execution, quantities may increase or decrease as per actual site requirements. The contractor must execute the work as per the instructions of the field engineer, and payments will be made proportionately based on actual executed quantities.
5. The 2% of bill amount (including earnest money) shall be retained as a Security money for free maintenance for the period as mentioned in your tender.
6. The retained amount shall be refunded without any bank interest after free maintenance period.
7. **Penalty for delay in completion of work:** The organisation may impose penalties for delay in completion of work except in case of natural calamities and law and order situation. The penalty amount shall be **Rs. 500 per day.** The tenderer must agree to bear the penalty amount for the delay in the completion of work.
8. The rates offered by the Bidder/Tenderer will be inclusive of all Taxes, License fees, Royalty, Octroi, Labour, Construction Materials, all Tools and Plants, Water, and Power required for satisfactory completion of the work.
9. In case of any mishap, injury or damage occurring at the site, it will be the responsibility of the Contractor.
10. Mention clearly that the rates are inclusive of GST or exclusive of GST and mention the GST rate in %.
11. **Final Payment:** Final payments will be made only after satisfactory completion of the work
12. The authority for the acceptance of the tender will rest with the organisation. It shall not be obligatory on the said authority to accept the lowest tender or any other tender and no tenderer (s) shall demand any explanation for the cause of rejection of his/their tender nor

will the organisation undertake to assign reasons for declining to consider or reject any particular tender or tenders.

13. Award in parts. BAIF reserves the right to award the work for all three units to one tenderer or divide the work among more than one tenderer, if considered necessary.
14. Site verification and measurements. Tenderers are advised to inspect the sites and verify access, ground conditions, boundary alignment and other requirements before quoting. No change in alignment or scope shall be made without approval.
15. The competent authority of the organisation for the acceptance of the tender reserves the right to divide the tender amongst more than one tenderer, if deemed necessary.
16. **Schedule of Payment:** The Schedule of payment shall be decided through negotiation as per condition mentioned by successful tenderer in his tender.
17. The final payment shall be made after satisfactory completion of work on production of tax invoice with warranty card.

For any clarification, please contact:

1. **BAIF Dehradun Office: 7897993041, 0135-3566165**
2. **Ram Raksha Joshi, US Nagar: +91-7453868478**
3. **Divyansh Pandey, US Nagar: +91-8619951141**

For BAIF Institute for Sustainable Livelihoods and Development

Nathanpur, Ring Road, Mussoorie Bypass, Jogiwala, Dehradun, Uttarakhand

Tender Form (On Letterhead)

CONTACT PERSON (FOR THE TENDERER)

Name	
Address	
Telephone/Contact No.	
E-mail	

ECONOMIC AND FINANCIAL CAPACITY

Financial Year	**2023-24**	**2024-25**	**2025-26**
Annual turnover (Rs. in Lakhs)			

EXPERIENCE

Complete the table using the format below to summarise the major relevant work carried out in the course of the past 5 years by the legal entity or entities submitting this tender. The number of references to be provided must not exceed 5 for the entire tender.

Sr. No.	Name and Address of Client	Capacity of Fencing Work Installed	Date/Year of Construction	Contract value (Rs.)

TENDER DECLARATION

1. I/We have read and examined all the tender documents.
2. We also undertake, if required, to provide evidence of the financial and economic standing and the technical and professional capacity according to the selection criteria for this call for tender. We also understand that if we fail to provide the proof/evidence required, within 7 calendar days after receiving the notification of award, or if the information provided is proved false, the award may be considered null and void.
3. I/We shall be debarred for tendering with BISLD-UK. Moreover, if such a violation comes to the notice of BISLD-UK before the date of start of work, BISLD-UK shall be free to forfeit the entire amount of earnest money deposit.
4. I/We hereby declare that I/We shall treat the tender documents drawings and other records connected with the work as secret/confidential documents and shall not communicate information derived therefrom to any person other than a person to whom I/We am/are authorised to communicate the same or use the information in any manner prejudicial to the safety of BISLD-UK.

Yours faithfully

Name and Signature of Authorised Person……

Date & Place……..

Seal of the firm/company/entity:

Quotation / Tender value

I am ready to supply the following items at the below mentioned rates:

Sr. No.	Item Description	Unit	Qty. per unit	Qty. for 3 units	Rate (₹) excl. GST	GST % / amount	Total amount (3 Units) (₹)
1	IS equal angle 50×50×5 mm heavy/corner posts, including corrosion-resistant paint and installation	kg	222.28	666.84			
2	IS equal angle 50×50×3 mm diagonal support posts, including paint and installation	kg	274.48	823.44			
3	IS equal angle 50×50×3 mm intermediate support posts, including paint and installation	kg	405.76	1,217.28			
4	Providing and erecting 1.80 m high GI chain link fencing, 50×50 mm aperture, 2.70 mm wire, including fixing accessories and tensioning	Rmt.	913.00	2,739.00			
5	Providing and laying 14-gauge GI barbed wire above chain link fencing	Rmt.	1,826.0	5,478.00			
6	Providing and laying 3.15 mm diameter GI horizontal tension wires	Rmt.	2,739.0	8,217.00			
7	Foundation hole excavation, 0.30 m diameter × 0.45 m depth	No.	137.00	411.00			
8	PCC nominal mix 1:3:6 for post foundations	m^3	4.11	12.33			
						Total Amount (in Rs.)	
Total Amount in Words:							

***Note:** The rate includes supply, transportation, installation, tensioning, fixing, foundation work, finishing and handing over of chain link fencing at the three designated village sites.

Any additional information

Date:

Signature with Stamp: