BAIF INSTITUTE FOR SUSTAINABLE LIVELIHOODS AND DEVELOPMENT

State Office: Madhya Pradesh

E-7/226, Bharat Nagar Road. Arera Colony, Bhopal 462016

E TENDER INVITATION FOR QUOTATION

To **Date: 19-11-2026**

_____

_____

_____

Dear Sir / Madam,

Sub.: INVITATION FOR QUOTATION FOR RENOVATION OF POND

You are invited to submit your most competitive quotation for the following product:

Sr. No.	Brief description of the product/work/ service	Specifications	Qty. (Unit)	Place of delivery/work/ service
1	Renovation & Beautification Work of Pond	As per attached estimate and Design	01	Village Bamorikalan , Bina, Dist- Sagar, M.P.

Detailed Description of the Product: As above

1. **Quoted Price:**

a. The offer shall be for the full quantity as described above. Corrections, if any, shall be made by crossing out, initialing, dating, and re-writing.
b. The party shall quote for goods/services in the attached format of the quotation.
c. All duties, taxes, and other levies payable on the raw materials and components shall be included in the total price.
d. The rates quoted by the party shall be fixed for the duration of the contract and shall not be subject to adjustment on any account.
e. Delivery and transportation at the cost of the party.
f. The prices shall be quoted in Indian Rupees only.

2. Each party must submit only one **SEALED** quotation. Party shall not contact other parties in matters related to this quotation.

3. Validity of Quotation

The quotation shall remain valid for a period not less than 30 days after the deadline fixed for submission of quotations.

4. **Evaluation of Quotations**

a. BAIF will evaluate and compare the quotations determined to be substantially responsive i.e. which are properly signed, and conform to the terms & conditions and specifications.
b. The evaluation would be done for all the goods / services put together or separately as feasible. The items for which no rates have been quoted would be treated as zero and the total amount would be computed accordingly.
c. A list of similar work undertaken with details of clients etc. if any, should be provided.
d. Contract will be awarded to the responsive party/parties based on technical-cum-commercial grounds.

5. **Award of Contract**

a. The contract will be awarded to the party/parties whose quotation has been determined to be substantially responsive and technical specifications and commercial terms best suited to the requirement. BAIF/BISLD, prior to the expiry of the validity period of the quotation, will notify the party/parties whose quotation has been accepted for the award of contract. The terms of the accepted offer shall be incorporated in the Purchase Order or Work Order. Quotations shall include GST and PAN Numbers.
b. Notwithstanding the above, BAIF reserves the right to accept or reject any quotation and to cancel the procurement process and reject all quotations any time prior to the award of the contract.
c. Rate contracts can be entered into for subsequent procurement. Order may be given partially and in multiple slabs.
d. The party/parties are bound to abide by the Organisation's Internal Committee guidelines.

6. Normal commercial guarantee / warranty shall be applicable to the supplied goods.

7. Terms of Payment: Within 10 days after delivery by cheque / electronic transfer on receipt of invoice**.**

8**. Security Deposit:** 10% of the total Work Order value shall be retained as a Security Deposit. The Security Deposit shall be released/refunded to the firm after successful completion of the pond renovation work and satisfactory performance during one rainy season.

9. Queries pertaining to specifications and scope, if any, may be clarified by contacting **Mr. Balwan Chouhan, Mobile No. 9755134225 during office hours.**

10. You are requested to provide your offer on or **before 26th November 2026** in the name of **BISLD Madhya Pradesh** only at the above address or send a mail to **bisld.mp@baif.org.in** with a password protected file only.

11. We look forward to receiving your quotations and thank you for your interest in this project.

BAIF Institute for Sustainable Livelihoods and Development



Authorised Signatory

RENOVATION OF POND

Estimate


Name of Work: Pond REJUVENATION AND BEAUTIFICATION BAMORIKALAN					
Name of Project – BPCL Project, Urmi, Bina (M.P.)					
GPS Coordinates: 24.217483N&78.13362E					
Location: Par Hansulkheri Road, Bamhorikela, Bina, Sagar District, Madhya Pradesh. 286 m from GPS Bamhori Kela 470113 (India)					
Gram Panchayat - Bamorikela					
SN	**Description**	**Qty.**	**Unit**	**Rate**	**Amount**
1	Site clearance including uprooting of rank vegetation, grass, brush wood, saplings and tree not exceeding 30cm girth and removing not exceeding 50meters outside the periphery of the area cleared.	**4200.00**	**Sqm**		
2	Excavation for trial pit or trial trench or other investigation work including dressing etc. complete. In all kinds of soil Soft/loose/hard/dense soils, moorum & moorum mixed with boulders and mud.	**22.50**	**cum**		
a	Excavation in all kind of soft/loose/hard/dense soils, moorum & moorum mixed with boulders and mud including dressing, placing the excavated soil	7883.75	cum		
b	Excavation in soft/disintegrated/weathered rock including wet excavation, dressing, placing the excavated material neatly in specified dump area or	18447.91667	cum		
3	Compaction of earthwork at optimum moisture content to achieve maximum dry density by mechanical sheep foot roller/vibratory	2073.6	cum		
4	Earthwork for cut off trench filling using selected impervious soil from approved borrow areas in layers of 250 to 300 mm (before compaction)	790.0	cum		
5	Loading, Transportation up to 400m, and unloading of soil	8326.4	cum		
6	Advanced Precast Concrete Shot Blasted & Sand Blasted Paver Block (Providing and laying factory made machine pressed precast cement concrete interlocking paver block of any shape and size conforming to IS:15658-2006 and ISI marked of 60 mm thickness, M-30 grade with grey cement and pigment all as specified. Made by block making machine with strong vibratory compaction, laid in required colour and pattern over and including 50mm thick compacted bed of stone dust, filling the joints with sand etc. all complete as per the direction of Engineer-in-Charge.	420.0	Sqm		
7	Structural steel work using M.S. flats, angles, channels I-section, H-section etc. riveted, bolted or welded in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.	6824.5	Kg		
8	Providing and constructing Dry rubble wall (toe wall) with stone of minimum size 0.021 cum at the base of stone pitching or rip-rap excluding excavation	349.6	cum		

Name of Work: Pond REJUVENATION AND BEAUTIFICATION BAMORIKALAN					
Name of Project – BPCL Project, Urmi, Bina (M.P.)					
GPS Coordinates: 24.217483N&78.13362E					
Location: Par Hansulkheri Road, Bamhorikela, Bina, Sagar District, Madhya Pradesh. 286 m from GPS Bamhori Kela 470113 (India)					
Gram Panchayat - Bamorikela					
SN	**Description**	**Qty.**	**Unit**	**Rate**	**Amount**
9	Dual-Arm Modular 5M Hot Dip Galvanised Conical Solar Street Light Pole, For Outdoor Height of Conical pole (in Meters) 8 Each bracket length (in mm) 500/1000/1500 Material of Conical pole High tensile sheet equivalent to BSEN 10025:2004/IS 2062:2011 Gr. E355BR No. of sections (in No.) 1 Cross-section of Octagonal pole (No. of sides) Conical Bottom 155 Top 70 Thickness 3 Type of welding Seamless Single longitudinal Saw weld (No circumference weld allowed) Metal protection treatment of fabricated mast section Hot dip Galvanised, as per IS:4759 latest: 460 g/m7 Luminaire carriage / brackets Fabricated suitably and hot dip galvanised Single Arm / Double Arm Base plate material Grade: E250, Quality: BR (as per IS:2062:2011 latest) Base plate size - (Length in mm x Width in mm x Thickness in mm) 250x250x16 Necessary accessories on each pole Suitable foundation Bolts - 4 in No., Nuts per bolt - 3 in No. Washers - 3 in No. Foundation Bolt type J-Type Bolt size M24x700 Conformity of specification for Bolts and Nuts as per IS:1367 (Part 2) , Grade A Galvanisation of foundation bolts and nuts and octagonal pole shall be Galvanised As per IS:4759 latest Compliance to wind velocity test for the pole structure IS 875:1987 part 3 latest	5.0	No.		
10	Semi-Integrated LED Solar Street Light	5.0	No.		
11	Construction of recharge structure including drilling vehicle bore 150mm dia	50.0	M		
12	RCC Bench, 3 Seater, with Backrest including Fitting and transportation	8.0	No.		
	Fountain				
1	Excavation for foundation for 6M dia	21.2	Cum		
2	PCC 1:3:6 base 100 mm thick	2.8	Cum		
3	RCC (1:2:4) circular slab + verticals	6.3	Cum		
4	Reinforcement steel (24 Kg per Cum)	680.0	Kg		
5	Tiling on top surface (anti-skid)	28.3	Sqm		
6	Tiling on vertical face (0.6 m high)	11.3	Sqm		
7	Stainless steel safety grill (circular)	74.7	Rmt		
8	Nozzle set (central + flower/spray)	1.0	Set		
9	Submersible fountain pump (1 HP)	1.0	No.		
10	Water supply pipe (HDPE/GI 25 mm dia)	25.0	m		
11	Electrical wiring + control panel	1.0	Set		
12	Testing, commissioning & finishing	1.0	LS		
13	Branding Marble stone (0.45*0.60) Set within a 1*1m concrete Block	1	**cum**		

Name of Work: Pond REJUVENATION AND BEAUTIFICATION BAMORIKALAN					
Name of Project – BPCL Project, Urmi, Bina (M.P.)					
GPS Coordinates: 24.217483N&78.13362E					
Location: Par Hansulkheri Road, Bamhorikela, Bina, Sagar District, Madhya Pradesh. 286 m from GPS Bamhori Kela 470113 (India)					
Gram Panchayat - Bamorikela					
SN	**Description**	**Qty.**	**Unit**	**Rate**	**Amount**
14	Branding - Paint Railing/Boundary with Asian Oil Paint as per BPCL Standard	1230	**m**		
				Total	
				18% GST	
				Net Amount	

Stainless steel Railing

Sr. No.	**Component**	Unit	Length	Total (Kg)
1	Vertical Pipes	63	0.6	37.8
2	Horizontal Rings	2	18.85	37.7
				74.67705 Kg

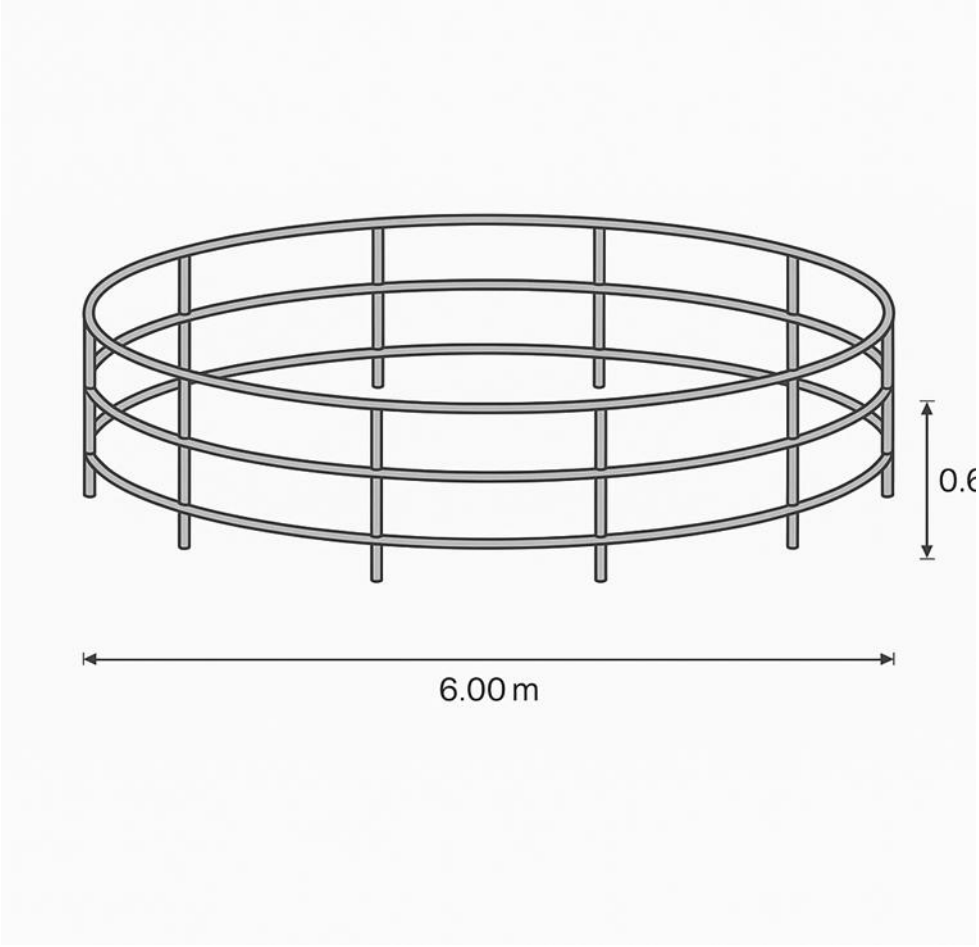

To be printed on letterhead / entered in printed quotation / proforma invoice / entered in this format with detailed stamp / seal)

Quotation No.:
Date:

To
The Chief Programme Executive
BISLD/BAIF

Quotation for _____

Sr. No.	Description of Goods	Specifications, scope, make, etc.	Unit	Qty.	Quoted Unit Price (Rs.)	Total Amount (Rs.) (A)	GST (__%) (Rs.) (B)	Other taxes/pkg./ installation charges/ Discount (Rs.) (C)	Transportation (Rs.) (D)	Gross Amount (Rs.) (A+B+C+D)
1										
2										
3										
4										
5										
	Total									

Terms and Conditions:

1. Warranty / Expiry :
2. Terms of payment :
3. Delivery of material within :
4. Delivery at :
5. Validity of quotation :
6. License (if applicable) (Enclose copy):
7. GST Registration No. (Enclose copy) : _____
8. Permanent Account Number (Enclose copy): _____

Signature and stamp of firm

Signature with Stamp of Firm
Name of Authorised Signatory