BAIF Development Research Foundation

BAIF-MITTRA Bhavan, Opp. Niwas Homes, Behind Bodhale Nagar, Nashik Pune Road, Nashik 422011
Ph. No. 0253-2416057/58, 2411745, 2411589 Fax No. 0253-2416056 E-mail: mittransk@gmail.com

INVITATION FOR QUOTATIONS FOR REPAIR OF EXISTING CHECK DAM

O. No. O.NO.BAIF/NASHIK/31/2023 Date: 17.01.23

You are invited to submit your most competitive quotation for the following product:

Brief Description of the Product	Quantity required (No.)	Place of Delivery	Expected month for Repairing Check dam
Repairing of Existing Check Dam Details Enclosed Annexure 1-2	1	Village - Chichondi Tal. Akole Dist. Ahmednagar	Jan.23

Detailed Description of the Product REPAIR OF EXISTING CHECK DAM
– As above

1. **Quoted Price:**
   a. The Quotation shall be valid up to 31.01.23 for the products described above.
   b. The bidder shall quote for goods / services in the attached format of quotation.
   c. All duties, taxes, F.O.R. and other levies payable by the bidder shall be included in the goods / services and shall stand final.
   d. The rates quoted for each good/service shall be fixed for the duration of the validity of the quotation and shall not be subject to adjustment.
   e. Corrections if any, shall be made by crossing out, initialing, dating and rewriting.
   f. The prices shall be quoted in Indian Rupees only.
2. **Each bidder must submit only one quotation. Bidder shall not contact other bidders in matters related to this Quotation.**
3. **Validity of Quotations:**
   The quotation shall remain valid up to 31.01.23 after the deadline fixed for submission of quotations.
4. **Evaluation of Quotations:**
   Purchaser will evaluate and compare the quotations determined to be substantially responsive i.e. which are properly signed and conform to the terms and conditions and specifications in the following manner.

   a. The evaluation will be done exclusive of GST.
   b. The evaluation will be done for all the goods / services put together. The items for which no rates have been quoted, will be treated as zero and the total amount will be computed accordingly. We will award the contract to the responsive bidder whose total cost for all the items put together is the lowest.
   c. Compare terms and conditions and specifications.

5. **Award of contract:**
   a. Purchaser will award the contract to the bidder whose quotation has been determined to be substantially responsive and who has offered the lowest price as per Para 4(b) above.
   b. Purchaser prior to the expiration of the quotation validity period will notify the bidder whose quotation is accepted of the award of contract. The terms of the accepted offer shall be incorporated in the Purchase Order or Work Order.
   c. Notwithstanding the above, purchaser reserves the right to accept or reject any quotations and to cancel the bidding process and reject all quotations at any time prior to the award of the contract.
6. Payment shall be made immediately within 15 days after delivery of goods/services.
7. Normal commercial guarantee / warranty shall be applicable to the supplied goods/ services.
8. **Submission of quotations:**
   - Sealed Envelope mentioning" Repair of Existing Checkdam on it.
   - **Last date of Submission is** 25/1/23 latest by 5:30 p.m.
   - Address: **Purchase Department, BAIF Development Research Foundation", BAIF-MITTRA Bhavan, Opp.Niwas Homes, Behind Bodhale Nagar, Nashik Pune Road, Nashik 422011.**

We look forward to receiving your quotations.

Note- You have to register your firm on – https://goo.gl/forms/m7lTz2K33q7mGtqx2

Yours Sincerely,

V.B. Dyasa

V. B . Dyasa
Regional Director
BAIF

Encl.: Format of Quotation

(To be printed on Pre-numbered Quotation format or if same is not available, then on Letterhead with unique number and date)

FORMAT OF QUOTATION

Sr. No.	Description of Goods	Specifications	Qty.	Unit	Quoted Unit Price	Total Amount
		Total				
		Taxes @ .....% (if any)				
		Grand Total				

Terms and Conditions:

1. GST Number –
2. Type of GST- Composite / Regular
3. Transport -
4. Validity of Quotation –
5. Warranty / Guarantee –
6. Expiry date of the material (wherever applicable) –
7. Days required to fulfil the order -
8. Damaged material will not be accepted.

Signature with Stamp of Firm

Annexure-1

Annexure-1

Name of Project: ASK Samrudha Kisan Project Akole

Village: Chichondi, Tal. Akole, Dist. Ahmednagar.

Location:

N19.559006

E73.765767

Gat No. 36

Name of work: Check Dam repair work site No. 2

Quotation Format

Sr. No.	Description	Total Quantity	Rate	Unit	Amount (Rs.)
1	Site Cleaning and approach road for material transport.	1		LS	
2	Excavation in hard murum including boulders up to 0.6 m diameter (0.113cum) for canal, seating of embankment, filter drains/ catch water drains etc., and placing the excavated stuff neatly in dump area or for formation of service road/ embankment including cost of all materials, machinery, lab our, dressing bed and sides to required level and profile etc., complete with lead up to 15 m and all lifts as directed	37.29		Cum	
3	**PCC work -**Providing and laying in situ cement concrete of grade M-10 of trap /granite / quartzite / graded metal for foundation and bedding((A) M-10 (20 MSA) (Cement 4.4 bags/Cum))	6.54		Cum	
4	Plum concrete 50% stone and 50% Concrete in M:15 Proportion	42.44		Cum	
5	**Coping Beam & Padadi work.-** Providing and laying in situ cement concrete of grade M15 of trap / granite / gneiss / quartzite / graded metal for PCC with or without surface reinforcement/ RCC concreting requiring heavy or special type of shuttering for works of gallery, sluice, spillway crest, spillway downstream face, energy dissipating structures, intake structures, training walls, piers, abutments etc. with Batching Plant and Transit mixer with centering, shuttering, scaffolding, placing, compacting, curing etc. complete with all lifts etc. complete as directed. (A) M-15 (20 MSA) (Cement 5.64 bags/Cum)	15.17		Cum	
6	Plaster on sloping side: Providing and laying cement plaster 6 mm thick in C.M.1:3 single coat without Nero finish to concrete surface in all position including centering, scaffolding, curing etc. complete as directed. (Cement 0.057 bags/Sqm)	66.50		Sqm	
7	**Steel -** Providing and fixing in position M.S bar reinforcement of various diameter and length including cutting bending hooking laying in position and tying M.S bars for reinforcement of R.C.C work as per detailed drawing etc. complete.	0.41		M.T.	

8	Providing and erecting centering work up to 3.00 m height including bracing, strengthening and dismantling etc. Complete.	92.74		Sqm	
9	Providing and fixing information board of acrylic sheet of 0.90x0.60 m on 3.0 m height of 50 x 50 x 6 mm angles and fixing the angles in M 10 concrete block of 45 x 45x 45 cm with one coat of red primer and two coats of oil paint.	1.00		No.	
	Total Amount Rs.				**0.00**
	GST 18 % (CGST 9% + SGST 9%)				
	Total Amount Rs. Including GST				

Annexure-2

Name of Project: ASK Samrudha Kisan Project Akole

Village: Chichondi, Tal. Akole, Dist. Ahmednagar.

Location: N19.559006, E73.765767 Gat No. 36
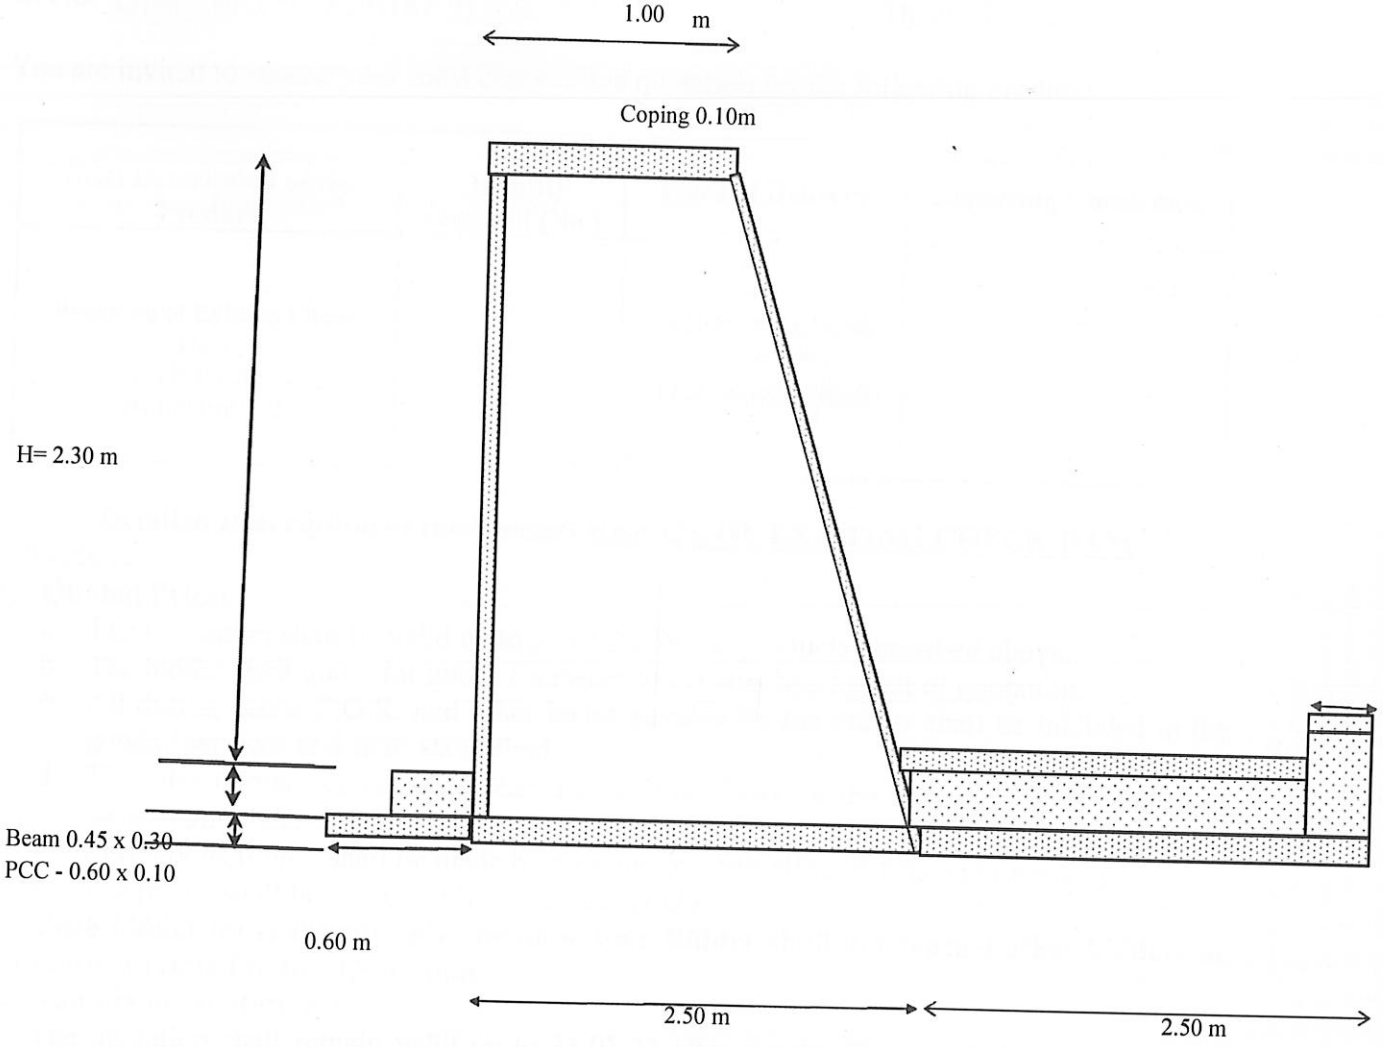
Name of work: Check Dam repair work site No. 2